

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Zuccherificio 2

29010 Sarmato (PC) - Italy

t +39 0523 8486

e info@jmgcranes.com




www.jmgcranes.com

Data subject to change without prior notice
Edition 10/2022 © 2022 JMG Cranes S.p.A. All rights reserved
Rev. 2 - 10/22



Electric
Pick & Carry
Cranes

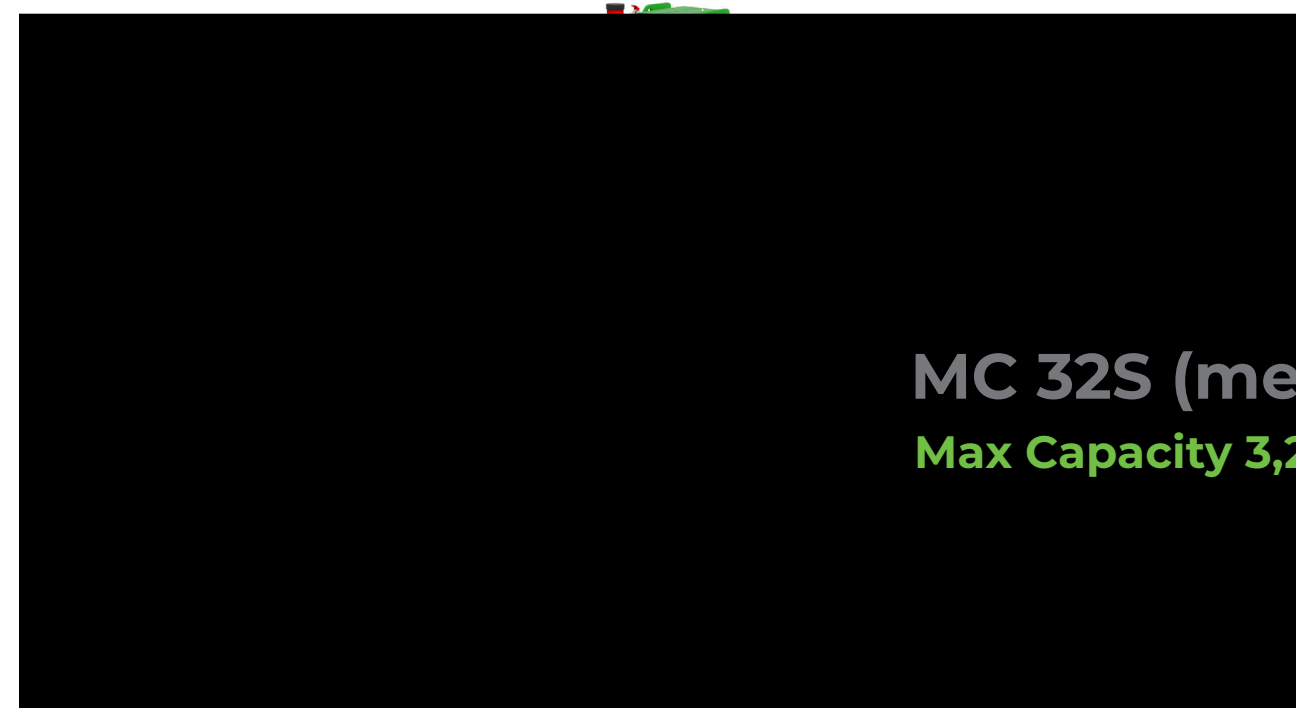

MC 32S (metric)
Max Capacity 3,200 Kg

JMG[®]
move to solution

MC 32S

RADIO REMOTE CONTROLLED

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHT

SEQUENTIAL BOOM

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- NON-MARKING TIRES
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING





Load charts



Technical features


Max Capacity kg	 3,200
Dimensions mm	 2430x980x1696

	Front-wheels drive. 2 electric motors AC 3 kW 48V Insulation class H	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 3,400 Removable counterweight Kg. 700		Automatic braking system on all wheels
	48 V - 500 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 2 superelastic 200/50-10" Rear nr. 2 superelastic 16x6-8"		+60°/-15°
	Rear Steering angle -90°/+90°		Motor driven pump 9 kW - 48 V AC, Insulation class H

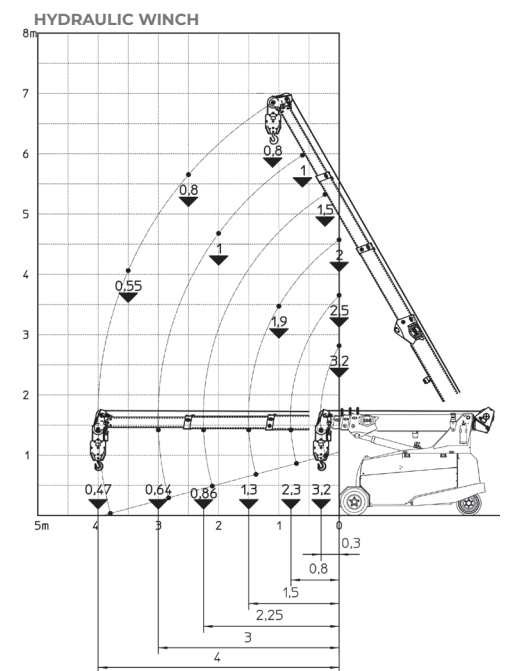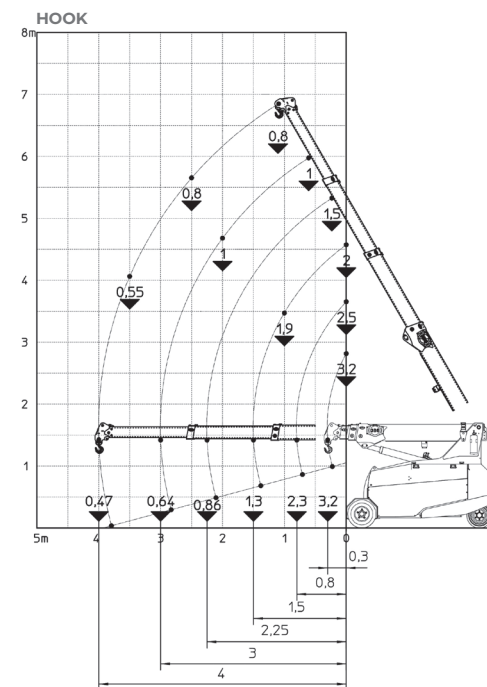

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2000/14-4301 -1:A1 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 e and subsequent modifications



Dimensions

